

iWALK®

# Welcome Guide

# Focus On True Value™



UK Authorized Representative

**THEMIS AR support ltd**

85 Great Portland St, London, United Kingdom, W1W 7LT

Christopher Jones +44-02037332302 legal@themisar.com

EU Authorized Representative

**Real Solutions Haarlem B.V**

Add: A. Hofmanweg 75 - 2031BH Haarlem, Netherlands

Tel: +31(0)88-9277277 Contact: Mike de Zwart, MSc



[www.iwalkworld.com/Service](http://www.iwalkworld.com/Service)



[Service@iwalk.net](mailto:Service@iwalk.net)



**US** 1-888-961-5888 | 24/7 service

**UK** 44-20-3885-0855 | 24/7 service

**CN** 400-8855-698 | Mon-Fri 09:00-17:00

**Head Office** 86-592-5030-771/780 | Mon-Fri 09:00-17:00



@iWALK.Fans

@iWALKKOREA

@iWALKUSA

@iWALKJAPAN



株式会社神州

## U2O GLOBAL CO.,LTD.

Head Office:U2O Building,Huanzhu Road 385,Jimei,Fujian,China

U.S. Office : 206 Terminal Drive Plainview, NY 11803

Dubai Logistic Center : 201, Atrium centre, Bank Street,Bur Dubai, UAE.

Korea Office : 4,19-ro 13-gil, Ganbuk-gu, Seoul, Korea

EU Logistic Center: A. Hofmanweg 75-2031BH Haarlem, Netherland

制造商: 厦门广开电子有限公司U2O GLOBAL CO.,LTD.

工厂地址: 中国福建省厦门市集美区环珠路385号U2O大厦, 361021



Made in China

## Safety Precautions

Please read the following carefully before using the iWALK product. Incorrect use or incompatibility with device may result in reduced battery performance or damage to your device.

01. Check device voltage for compatibility with this product.
02. The portable power bank will generate heat when charging. Always charge in a well-ventilated area. Do not charge under pillows, blankets or on flammable surfaces.
03. Keep the portable power bank away from heat sources, direct sunlight, combustible gas, humidity, water or other liquids. (Operating temperature: -10°C ~40°C)
04. Do not disassemble, open, microwave, incinerate, paint or insert foreign objects into the portable power bank.
05. Do not subject the portable power bank to mechanical shock such as crushing, bending, puncturing or shredding. Avoid dropping or placing heavy object on the portable power bank.
06. Do not short-circuit the portable power bank or store it in a receptacle where it may be short-circuited by other metallic or conductive objects.
07. Portable power bank usage by children should be supervised.
08. In case of abnormalities during usage, stop use the product immediately and contact our service department.

\*Thank you for using this product of our company. In order to let you experience the product swimmingly, Please read the operating instructions (including charging instructions and information on the minimum and maximum operating temperatures), supplied with the portable power bank. In case of any printing or translation error, we apologize for the inconvenience. As for the content charge, we are sorry for no further notice.

## Product Structure

USB-A Output(Stand 5V output, Fast charge compatible with QC2.0/3.0/4.0, SCP, FCP, AFC, SFCP, PE1.1/2.0)

Lightning Charging Cable:  
5V Output(Support PD fast charge)

USB-C Cable PD 18W Input &  
Output(Compatible with QC2.0/  
3.0/4.0, SCP, FCP, AFC, SFCP,  
PE1.1/2.0)



Lightning Input:  
5V/2A, Support PD18W

Power Button:  
Short press to turn on

LCD Display

USB-C Input  
(Compatible with  
QC2.0/3.0, FCP,  
SCP, AFC, PE1.1)


## Display Content

Input and output voltage:

Normal input and output 5V

Fast charge input and output 6~9V

(Note: only 9V will be displayed when it exceeds 9V)

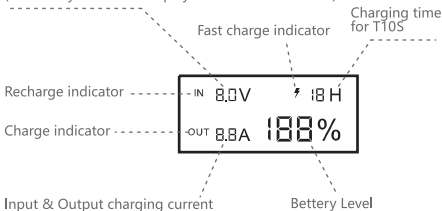

## Specifications

Product Name	Trio 2-PD
Model No.	UBO10000S/T10S
Capacity	10000mAh 3.7V/37Wh
Input	Lightning Port 5V=2A, 9V=2A Max USB-C Port 5V=2.4A, 9V=2A, 12V=1.5A USB-C Cable 5V=2.4A, 9V=2A, 12V=1.5A
Output	Lightning Cable 5V=2.4A, 9V=2A USB-A Port 5V=2.4A, 9V=2A, 12V=1.5A Max USB-C Cable 5V=2.4A, 9V=2A, 12V=1.5A Max
Dimension	153x76x14.6mm
Weight	221g

## Instructions

Be sure the charging voltage of your device is compatible with it.

1. Connect UBT10000XP with digital devices via correct ports.
2. Press the power button to start charging. The power display will show the remaining power.
3. Please disconnect after devices are fully charged.



### Note:

- ※ This product's built-in lightning cable's fast charge function may not reach the maximum output power due to different models of mobile phones or system upgrades.
- ※ While charging for one device with quick output function, this product could not charge for another or more devices at the same time.
- ※ To use the quick charge function of this product, please ensure that your device has the corresponding quick charge function.

## Recharge

Connect the charger with a USB-C or Lightning charging cable, and charge the mobile power supply through the USB-C or Lightning charging port.



Note: For the best charging of this product, please use at least 5V/2.0A output charger for charging.

## Pass-through Charging



Allows the product to charge one device at the same time when charging the product.

**2.4A**  
HIGH SPEED

Charge two devices at the same time, it is not recommended to charge three devices at the same time.



## Q & A

Q: Why won't the product power on if not used for an extended duration?

A: "Trio 2" will not power on if unused for an extended period of time. When "Trio 2" is left unused for an extended duration, it will discharge gradually until no power remains. Product will work normally after 2-3 minutes of charging. We suggest to charge the product every 3 months to maintain its best functionality.

Q: Why does the product heat up when it is charging/discharging?

A: "Trio 2" heats up during charge and discharge cycles. This is a common occurrence, due to power consumption, and will not affect product's functionality. The product will not overheat due to its built-in overcharge protection circuitry.

# Warranty card

Thank you for purchasing the iWALK product.

Our product's warranty period is 12 months starting from the date of purchase. Within the warranty period, free service will be provided to the consumer, if the product has any quality problems (requiring warranty card with distributor's official stamp and valid S/N).

Paid service: customer will incur a repair charge as follows:

- No valid warranty card or warranty card incompatible.
- No S/N or S/N incompatible with warranty card
- Malfunction caused by artificial damages (like external impact or submerging product into water, ect.)
- Misuse of the product. User has not followed the instructions in the manual.
- Product disassembled or repaired by individual or unauthorized service center.
- Damages caused by storing the product in a hot or humid environment.
- Defects or malfunctions due to force majeure.

## Dealer's Information

Dealer Name:  
Product Type:  
Tel:  
Sales Date:

## User's Information

Model No.:  
Product Name:  
User's Name:  
E-mail:  
Tel:  
ADD:  
Warranty Content:

(Please complete warranty card and use for any future warranty service)

## 安全注意事项

在您使用iWALK产品前，请先仔细阅读以下内容。

不正确的使用或者使用于不兼容的设备，可能会降低产品性能或者损坏设备。

- 01.使用前请检查设备的电压与本产品的兼容性。
- 02.移动电源在使用过程中会发热，请确保在通风情况良好的环境下使用。  
尤其避免在枕头、毛毯、被褥及其他可燃物覆盖下使用。
- 03.请确保移动电源远离热源，避免置于阳光直射、可燃气体、潮湿、水或者其他液体的环境中。（使用温度范围-10°C-40°C）
- 04.请勿私自拆解、打开、微波、焚烧、涂画移动电源或将其他物体插入移动电源内部。
- 05.请勿使便携式移动电源受到机械冲击，例如挤压、弯曲、穿刺或切割，避免将重物掉落或压在移动电源上。
- 06.请勿使移动电源短路或将其存放在可能会被其他金属或导电物体短路的容器中。
- 07.儿童须在成人的监护下使用移动电源。
- 08.产品使用过程中，如果发生异常现象，请立即停止使用，并与本公司售后服务部联系咨询。

\*感谢您使用本公司产品，为了让您轻松体验产品，请仔细阅读包装内的用户手册（包括充电指导和有关最高最低工作温度的信息）。如有任何印刷错误或翻译失误望广大用户谅解，当涉及内容有所更改时，恕不另行通知。

## 产品结构

USB-A输出接口：  
(普通5V输出，快充兼容QC2.0/3.0/4.0  
SCP、AFC、FCP、SFCP、PE1.1/2.0)

USB-C线双向输入输出PD 18W  
(兼容QC2.0/3.0/4.0  
SCP、AFC、FCP、SFCP、PE1.1/2.0)

Lightning输出线：5V输出  
(支持PD快充输出)



USB-C输入口：  
单向输入  
(兼容QC2.0/3.0、  
FCP、SCP、AFC、PE1.1)

LCD显示屏

电源开关按键：  
短按开机

Lightning输入口：  
5V/2A，支持PD18W

## 产品指示器

输入输出电压:

普通输入输出5V

快充输入输出6~9V

(快充输入输出超过9V时也只显示9V)

快充输入或输出时  
会出现此符号


充满本体  
所需时间

给本体充电显示

给外部设备充电显示

输入输出电流数值显示

电量显示



## 产品规格

产品名称	终结者Pro移动电源
产品型号	T10S
锂聚合物电池容量	10000mAh 额定能量 3.7V/37Wh
输入	Lightning □ 5V=2A, 9V=2A Max USB-C □ 5V=2.4A, 9V=2A, 12V=1.5A USB-C 线 5V=2.4A, 9V=2A, 12V=1.5A
输出	Lightning 线 5V=2.4A, 9V=2A USB-A □ 5V=2.4A, 9V=2A, 12V=1.5A Max USB-C 线 5V=2.4A, 9V=2A, 12V=1.5A Max (多端口输出时, 5V输出3A Max)
转换率	60%
额定容量	6000mAh
产品尺寸	153x76x14.6mm
产品重量	221g
执行标准	GB/T35590-2017

## 产品说明

使用前请检查设备的电压与本产品的兼容性

- 1:正确选择相应数码产品接口后，连接移动电源。
- 2:连接后按下开关按钮，自动给数码产品充电。
- 3:在完成充电后，请断开数码产品连接线。



注意：

- ※本产品自带苹果线的快充功能可能因不同型号的手机或者系统升级导致快充功率达不到最大输出。
- ※当使用本产品的快充输出功能给一台设备进行快速充电时，本产品无法同时给更多的设备进行充电。
- ※若要使用本产品的快充功能，请确保您的智能设备具有相应的快充功能。

## 给本体充电

采用USB-C或Lightning充电线连接充电器，通过USB-C或Lightning充电口给移动电源进行充电



注：为了更好的给本产品充电，请使用至少5V/2.0A输出充电器进行充电。

## 边充边放



在给本体进行充电时，允许本产品给一台设备同时进行充电。

**2.4A**  
HIGH SPEED

同时给两台设备充电，不建议同时给三台设备充电



## Q & A

Q1: 本产品长时间放置不用后为什么不能正常工作?

A1: 因为产品长时间放置不用, 使电池电量逐渐耗尽, 给本产品充电约2-3分钟, 电量指示灯亮起, 即可以正常工作, 如本产品不经常使用, 请3个月充一次电, 以保证产品的正常使用。

Q2: 充/放电时产品发热?

A2: 充/放电时消耗电能因此会有发热现象, 但不影响产品性能。本产品内部有温度保护设计, 因此不会出现过热现象。

# 保修卡

感谢您购买本公司的产品。

本产品的保修期为购买之日起12个月，在此期间遇到质量问题可凭保修卡（须加盖销售商公章及有效产品S/N号）到销售商享受免费服务。

收费服务-以下情况属于有偿服务

- 无有效的保修卡及保修卡内容不符
- 无产品S/N号或S/N号与保修卡上填写不一致
- 人为损坏（外力撞击、进水等）导致故障发生
- 违规操作
- 非服务中心人员自行拆卸或修理
- 因将产品放置在高温或潮湿的环境中所导致的故障

## 经销商信息

经销商名称:

产品类型:

电话:

销售日期:

## 用户信息

产品型号:

产品名称:

用户姓名:

邮箱:

电话:

地址:

保修内容:

注意：请务必妥善填写并保存本保修卡以备保修使用！